

NSMI 1251-6102

Air-water chiller

Cooling capacity 285,6 ÷ 1342,6 kW

- Microchannel coils
- Night mode
- Operation up to 50 °C outdoor air
- Low electrical consumption



DESCRIPTION

Air-cooled outdoor chiller designed to meet air conditioning needs in residential/commercial complexes or industrial applications.

Outdoor units with high-efficiency screw compressors axial fans, microchannel external coils and plant side shell and tube heat exchanger. In the unit with desuperheater, it is also possible to produce free-hot water.

The base the structure and the panels are made of steel treated with polyester paint RAL 9003.

VERSIONS

- A High efficiency
- E Silenced high efficiency

FEATURES

Operating field

Operation at full load up to 50 °C external air temperature depending on the size and version. For more information refer to the dedicated documentations or the selection program Magellano.

Unit with 1 / 2 cooling circuits

Unit with 1–2 refrigerant circuits.

The single circuit units have the inverter compressor, while the dual-circuit have an asynchronous compressor on/off switch and an inverter, the combination provides both high efficiency at part load and full load.

Aluminium microchannel coils

The microchannel condensing aluminum coils ensure high levels of efficiency, reduced quantities of refrigerant and lower unit weight. The treatment "O" available as configurator it ensures high resistance to corrosion even in the most aggressive environments.

Condensation control temperature

Fitted as standard with a device for electronic condensation control so that the unit can work even with low temperatures, adapting the air flow rate to the actual system request in order to reduce consumption.

Electronic expansion valve

The possibility to use electronic expansion valve, offers significant benefits, especially when the chiller is working with partial loads, increasing the energy efficiency of the unit.

Integrated hydronic kit

Integrated hydronic kit containing the main hydraulic components; available with various configurations with one or two pumps, high or low head, to obtain a solution that allows you to save money and to facilitate installation.

Low noise version

Silenced versions "E" feature a special compressor jacket which ensures a further noise reduction of approximately 4dB.

CONTROL PCO⁵

Microprocessor adjustment, with 7", touch screen keyboard, which allows to navigate intuitively among the various screens, allowing to modify the operating parameters and graphically view the progress of some variables in real time and the adjustment includes complete management of the alarms and their log.

- Possibility to control two units in a Master-Slave configuration
- The presence of a programmable timer allows functioning time periods and a possible second set-point to be set.
- The temperature control takes place with the integral proportional logic, based on the water output temperature.
- **Night Mode:** it is possible to set a silenced operation profile. Perfect for night operation since it guarantees greater acoustic comfort in the evenings, and a high efficiency in the time of greater load.

ACCESSORIES

AER485P1: RS-485 interface for supervision systems with MODBUS protocol.

AER485P1 x n° 2: RS-485 interface for supervision systems with MODBUS protocol.

AERNET: The device allows the control, the management and the remote monitoring of a Chiller with a PC, smartphone or tablet using

Cloud connection. AERNET works as Master while every unit connected is configured as Slave (max. 6 unit); also, with a simple click is possible to save a log file with all the connected unit datas in the personal terminal for post analysis.

MULTICHILLER_EVO: Control, switch-on and switch-off system of the single chillers where multiple units are installed in parallel, always ensuring constant flow rate to the evaporators.

ACCESSORIES COMPATIBILITY

Accessories

Model	Ver	1251	1601	1801	2352	2652	2802	3202	3402	3802	4102	4402	4802	5202	5702	6102
AER485P1	A,E	.	.	.												
AER485P1 x n° 2 (1)	A,E			
AERNET	A,E
MULTICHILLER_EVO	A,E
PRV3	A,E

(1) x Indicates the quantity of accessories to match.

Antivibration

Ver	1251	1601	1801	2352	2652	2802	3202	3402	3802	4102	4402	4802	5202	5702	6102	
Integrated hydronic kit: 00																
A	AVX991	AVX992	AVX993	AVX966	AVX970	AVX995	AVX995	AVX995	AVX996	AVX998	AVX997	AVX998	AVX998	AVX998	AVX998	
E	AVX991	AVX992	AVX994	AVX966	AVX970	AVX995	AVX995	AVX995	AVX996	AVX998	AVX997	AVX998	AVX998	AVX998	AVX998	

Heater exchangers

Ver	1251	1601	1801	2352	2652	2802	3202	3402	3802	4102	4402	4802	5202	5702	6102
A,E	KRS (1)	KRS (1)	KRS (1)	KRS (1)	KRS (1)	KRS (1)	KRS (1)	KRS (1)	KRS (1)	KRS (1)	KRS (1)	KRS (1)	KRS (1)	KRS (1)	KRS (1)

(1) Contact us

A grey background indicates the accessory must be assembled in the factory

Anti-intrusion grid kit

Ver	1251	1601	1801	2352	2652	2802	3202	3402	3802	4102	4402	4802	5202	5702	6102
A,E	GPV (1)	GPV (1)	GPV (1)	GPV (1)	GPV (1)	GPV (1)	GPV (1)	GPV (1)	GPV (1)	GPV (1)	GPV (1)	GPV (1)	GPV (1)	GPV (1)	GPV (1)

(1) Contact us

A grey background indicates the accessory must be assembled in the factory

CONFIGURATOR

Field	Description
1,2,3,4	NSMI
	Size
5,6,7,8	1251, 1601, 1801, 2352, 2652, 2802, 3202, 3402, 3802, 4102, 4402, 4802, 5202, 5702, 6102
9	Model
	° Cooling only
10	Heat recovery
	° Without heat recovery
	D With desuperheater (1)
11	Version
	A High efficiency
	E Silenced high efficiency
12	Coils
	° Alluminium microchannel
	0 Painted alluminium microchannel
	R Copper-copper
	S Copper-Tinned copper
	V Copper-painted aluminium
13	Fans
	° Standard
	J Inverter
14	Power supply
	° 400V~3 50Hz with fuses
15,16	Integrated hydronic kit
	Without hydronic kit
	00 Without hydronic kit
	Kit with n° 1 pump (2)

Field	Description
PA	Pump A
PB	Pump B
PC	Pump C
PD	Pump D
PE	Pump E
PF	Pump F
PG	Pump G
PH	Pump H
PI	Pump I
PJ	Pump J
	Pump n° 1 pump + stand-by pump
DA	Pump A + stand-by pump
DB	Pump B + stand-by pump
DC	Pump C + stand-by pump
DD	Pump D + stand-by pump
DE	Pump E + stand-by pump
DF	Pump F + stand-by pump
DG	Pump G + stand-by pump
DH	Pump H + stand-by pump
DI	Pump I + stand-by pump
DJ	Pump J + stand-by pump
	Kit with 2 pumps
TF	Double pump F
TG	Double pump G
TH	Double pump H
TI	Double pump I
TJ	Double pump J

(1) Minimum water temperature of 35 °C must always be ensured at heat exchanger inlet if working with low temperatures of water produced in the primary circuit.

(2) For all configurations including pump J please contact the factory.

PERFORMANCE SPECIFICATIONS

NSMI - A/E

Size		1251	1601	1801	2352	2652	2802	3202	3402	3802	4102	4402	4802	5202	5702	6102
Cooling performance 12 °C/7 °C(1)																
Cooling capacity	kW	285,6	382,0	464,0	519,1	605,4	659,4	725,2	802,4	842,6	948,0	1008,8	1110,4	1204,3	1253,0	1342,6
Input power	kW	91,3	120,2	149,5	167,1	194,3	212,3	232,7	257,5	269,9	304,8	324,7	356,2	397,4	415,9	454,6
Cooling total input current	A	155,0	200,0	245,0	293,0	337,0	360,0	393,0	431,0	443,0	517,0	547,0	619,0	665,0	728,0	761,0
EER	W/W	3,13	3,18	3,10	3,11	3,12	3,11	3,12	3,12	3,12	3,11	3,11	3,12	3,03	3,01	2,95
Water flow rate system side	l/h	49130	65700	79773	89247	104092	113376	124682	137945	144852	162983	173442	190903	207040	215409	230815
Pressure drop system side	kPa	45	15	21	18	25	28	33	27	30	39	45	38	44	49	55

(1) Data 14511:2018; System side water heat exchanger 12 °C/7 °C; External air 35 °C

ENERGY DATA

Size		1251	1601	1801	2352	2652	2802	3202	3402	3802	4102	4402	4802	5202	5702	6102	
Cooling capacity with low leaving water temp (UE n° 2016/2281)																	
SEER	A,E	W/W	4,51	4,59	4,56	4,73	4,75	4,74	4,75	4,78	4,78	4,75	4,73	4,75	4,67	4,59	4,61
ηsc	A,E	%	177,50	180,70	179,30	186,00	187,10	186,40	186,90	188,00	188,10	186,90	186,30	186,90	183,60	180,60	181,50

ELECTRIC DATA

Size		1251	1601	1801	2352	2652	2802	3202	3402	3802	4102	4402	4802	5202	5702	6102	
Electric data																	
Maximum current (FLA)	A,E	A	251,3	291,3	377,7	442,0	473,0	519,4	519,4	567,4	653,8	708,1	753,5	874,8	917,2	1002,2	1036,2
Peak current (LRA)	A,E	A	51,3	51,3	57,7	57,7	605,0	651,4	651,4	775,4	861,8	989,1	1059,4	1180,2	1335,2	1420,2	1532,2

GENERAL TECHNICAL DATA

Size		1251	1601	1801	2352	2652	2802	3202	3402	3802	4102	4402	4802	5202	5702	6102	
Compressor																	
Type	A,E	type	screw														
Compressor regulation	A,E	Type	Inverter Inverter Inverter Inverter Inverter Inverter Inverter Inverter Inverter Inverter Inverter Inverter Inverter Inverter Inverter Inverter														
Number	A,E	no.	1	1	1	2	2	2	2	2	2	2	2	2	2	2	
Circuits	A,E	no.	1	1	1	2	2	2	2	2	2	2	2	2	2	2	
Refrigerant	A,E	type	R134a														
Refrigerant charge	A,E	kg	28,0	28,0	30,0	81,0	92,0	110,0	114,0	107,0	131,0	146,0	163,0	183,0	183,0	195,0	195,0
System side heat exchanger																	
Type	A,E	type	Shell and tube														
Number	A,E	no.	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Hydraulic connections																	
Connections (in/out)	A,E	Type	Grooved joints														
Sizes (in/out)	A,E	Ø	5"	6"	6"	6"	6"	6"	6"	6"	8"	8"	8"	8"	10"	10"	10"

Fans


Size		1251	1601	1801	2352	2652	2802	3202	3402	3802	4102	4402	4802	5202	5702	6102
Standard																
Fan																
Type	A,E	type	Axial													
Fan motor	A,E	type	Asynchronous with phase cut													
Number	A,E	no.	8	8	10	10	12	14	14	14	16	18	20	22	22	22
Air flow rate	A,E	m³/h	128000	128000	160000	160000	192000	224000	224000	224000	256000	288000	320000	396000	396000	396000

Sound data

Size		1251	1601	1801	2352	2652	2802	3202	3402	3802	4102	4402	4802	5202	5702	6102	
Sound data calculated in cooling mode (1)																	
Sound power level	A	dB(A)	97,2	98,6	98,6	98,6	98,8	99,9	99,9	100,3	100,3	100,4	101,0	102,9	103,2	102,9	103,2
	E	dB(A)	92,9	95,8	95,9	94,7	95,1	96,1	96,1	97,3	97,4	97,7	98,0	99,9	99,9	99,9	99,9
Sound pressure level (10 m)	A	dB(A)	64,8	66,2	66,1	66,1	66,2	67,1	67,1	67,5	67,5	67,4	67,9	69,7	69,9	69,7	69,9
	E	dB(A)	60,6	63,4	63,4	62,1	62,5	63,3	63,3	64,6	64,5	64,7	64,8	66,7	66,7	66,7	66,7

(1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure (cold functioning) measured in free field, 10m away from the unit external surface (in compliance with UNI EN ISO 3744).

DIMENSIONS

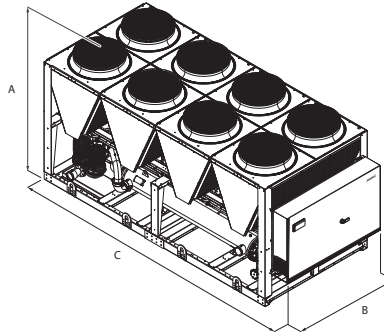

Size			1251	1601	1801	2352	2652	2802	3202	3402	3802	4102	4402	4802	5202	5702	6102
Dimensions and weights																	
A	A,E	mm	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450
B	A,E	mm	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200
C	A,E	mm	4760	4760	5950	6400	7140	8330	8330	8330	9520	10710	11900	13090	13090	13090	13090
Without hydronic kit																	
Dimensions and weights																	
Weight empty	A	kg	3752	4162	4578	6039	6447	6896	6987	7635	8103	8872	9324	10798	10888	10918	10991
	E	kg	4054	4464	4880	6642	7050	7499	7590	8239	8706	9475	9928	11637	11727	11757	11830
Weight functioning	A	kg	3832	4416	4832	6360	6768	7206	7275	8165	8632	9389	9841	11730	11819	11835	11908
	E	kg	4134	4718	5134	6964	7371	7809	7878	8768	9236	9993	10445	12568	12658	12674	12747

Aermec reserves the right to make any modifications deemed necessary.
All data is subject to change without notice. Aermec does not assume responsibility or liability for errors or omissions.

Aermec S.p.A.

Via Roma, 996 - 37040 Bevilacqua (VR) - Italia
Tel. 0442633111 - Telefax 044293577
www.aermec.com